BACKHOES

BK200 / BK230 / BK300

sitrex®
your partner in farming

BACKHOES

BK200 / BK230 / BK300

Made with high quality materials.

Backhoe applicable to all wheeled and tracked tractors equipped with hydraulic lifting equipped with double jack rotation, independent hydraulic outriggers, distributor with safety valves and joystick control levers.
Built with quality steel, case-hardened and ground pins and bushings on all the joints.

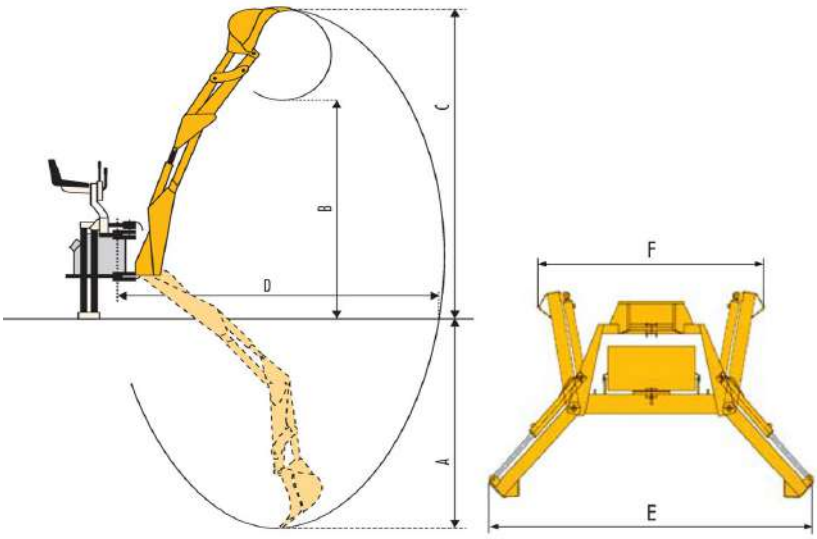

Specifications	BK200	BK230	BK300
A - Digging Depth (two foot flat bottom)	74,8” 190 cm	90,5” 230 cm	122” 310 cm
B - Loading Heigth (bucket at 60°)	70,9” 180 cm	86,6” 220 cm	106,3” 270 cm
C - Loading Heigth	102,4” 260 cm	114,2” 290 cm	145,7” 370 cm
D - Reach from Center Line of Swing Pivot	108,3” 275 cm	120” 305 cm	151,5” 385 cm
E - Stabilizer Spread, down position	85” 146 cm	85” 146 cm	102,4” 160 cm
F - Stabilizer Spread, up position	57,5” 146 cm	57,5” 146 cm	63” 160 cm
Ripping Force at the Tooth	4400 lb 2000 kg	4850 lb 2200 kg	6390 lb 2900 kg
Shipping Weight (with bucket)	770 lb 350 kg	840 lb 380 kg	1608 lb 730 kg

Designs, materials and/or specifications are subject to change without notice and without liability thereof.

Your partner in farming

sitrex®
your partner in farming

MEMBER FEDER UNACOMA

FARM EQUIPMENT MANUFACTURERS ASSOCIATION

ACCREDIA

ISO 9001 CERTIFICATION intertek

Organization with certified Management System ISO 9001

Viale Grecia, 22 - 06018 Trestina (PG) - ITALY | **Phone**: +39 075.854.00.21 | **Email**: sitrex@sitrex.it | **www.sitrex.com**